

A Blast Headform Surrogate for the Assessment of Blast-Induced Traumatic Brain Injury

Dr. Amal Bouamoul

Mr. Simon Ouellet

Defence Research & Development Canada - Valcartier
Weapons Effects and Protection

CTTSO/TSWG/PPE Symposium
Florida, US

27th-30th November 2012



Recherche et développement
pour la défense Canada

Defence Research and
Development Canada

Canada

Report Documentation Page			Form Approved OMB No. 0704-0188					
<p>Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p>								
1. REPORT DATE 27 NOV 2012	2. REPORT TYPE	3. DATES COVERED 00-00-2012 to 00-00-2012						
4. TITLE AND SUBTITLE A Blast Headform Surrogate for the Assessment of Blast-Induced Traumatic Brain Injury			5a. CONTRACT NUMBER					
			5b. GRANT NUMBER					
			5c. PROGRAM ELEMENT NUMBER					
6. AUTHOR(S)			5d. PROJECT NUMBER					
			5e. TASK NUMBER					
			5f. WORK UNIT NUMBER					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Defence R&D Canada - Valcartier, 2459 Pie-XI Blvd North, Quebec (Quebec) G3J 1X5 Canada,			8. PERFORMING ORGANIZATION REPORT NUMBER					
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)					
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)					
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited								
13. SUPPLEMENTARY NOTES DRDC-VALCARTIER-SL-2012-340								
14. ABSTRACT								
15. SUBJECT TERMS								
16. SECURITY CLASSIFICATION OF: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33.33%; padding: 2px;">a. REPORT unclassified</td> <td style="width: 33.33%; padding: 2px;">b. ABSTRACT unclassified</td> <td style="width: 33.33%; padding: 2px;">c. THIS PAGE unclassified</td> </tr> </table>			a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 17	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified						

Introduction

- Incidence of brain injuries has increased significantly during recent conflicts. This might be due to :
 - Improved body armour that enhances soldier survivability
 - Changes in nature of combat and associated threats
- The sequelae of mTBI can be devastating
- Hypothetical cause of the mTBI appears to be single or repetitive exposure to shock/blast loading conditions
- It has became the subject of strong research interest in the defence and health care community
- Current combat helmets **may not protect adequately** against primary blast effects

Introduction

Strategy

Facilities

Iterations

BI²PED & results

Upcoming work

Conclusion

- 1- Wagner, C., "Brain injuries high among Iraq casualties", ARNEWS, Army News Services, November 24, 2003
- 2- Jontz, S., "More head injuries in Afghanistan, Iraq push improvements in protective gear", Stars and Stripes, January 30, 2004.
- 3- Amburn, B., "Brain injuries lead Iraq war injuries", United Press International, July 23, 2004
- 4- Jaffe, G., "An Army Surgeon Says New Helmet Doesn't Fit Iraq", The Wall Street Journal, August 25, 2004
- 5- Okie, S., "Traumatic Brain Injury in the War Zone", N. Engl. J. Med., 335:20, pp. 2043-2047, May 2005

Objectives

- Develop a test device *to evaluate headgear performance* for mitigating blast overpressure induced mTBI
 - Robust and reusable: *Capable of withstanding repeated blast exposure*
 - Repeatable and consistent: *Minimal variation in response between tests and between copies*
 - Instrumented adequately: *Record the relevant physical parameters inside and outside the headform*
 - Biofidelic wrt external geometry: *Correct fit of headwear, Representative blast diffraction around headform*
 - Biofidelic wrt internal geometry and material selection: *Stress transmission/reflection within the headform*
- Perform a series of CFD simulations to examine the blast wave propagation between a headform and various helmet designs
 - Featureless, channelling and padding

Introduction

Strategy

Facilities

Iterations

BI²PED & results

Upcoming work

Conclusion

Development Strategy

Introduction

Strategy

Facilities

Iterations

BI²PED & results

Upcoming work

Conclusion

- Develop successive versions of a headform, increasing complexity and biofidelity at each iteration
 - Start from a simplified shape (ovoid) and evolve to a more complex geometry
 - Progressively increase number of physiological features (CSF, membranes, etc...).
 - Gain experience with:
 - Manufacturing and durability of the selected materials
 - Performance and suitability of selected instrumentation
 - Wave dynamics occurring outside and within the surrogate brain
- Conduct CFD and FEM studies in parallel to the experimental work
- Final validation stage including direct comparison with PMHS data

Testing facilities

Introduction

Strategy

Facilities

Iterations

BI²PED & results

Upcoming work

Conclusion

- Different test facilities were used
 - Blast chamber
 - Detonics Bay
 - Free-field blast test site
- Care was taken to generating representative blast waves of various magnitude and duration



Design Iterations

Introduction

Strategy

Facilities

Iterations



BI²PED & results

Upcoming work

Conclusion


Mk .5 Headform:

Simplified ovoid geometry (based on ISO-J headform) with skull and brain component





Mk 1 Headform:


Introduce skull geometry, thickness and simplified physiological features, material identification, fabrication and assembly of a biofidelic skin surrogate

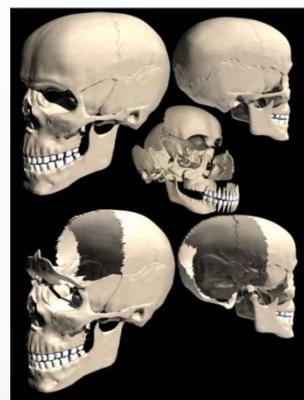

Urethane rubber to mimic the skin

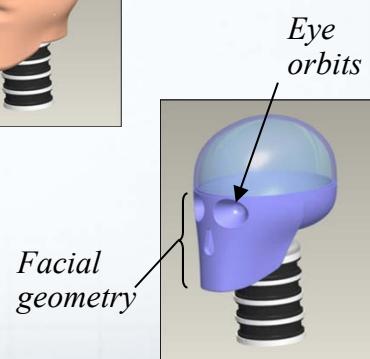



Details of the skull base geometry



Design Iterations

Mk 2 Headform:

Implement brain structure with falx and tentorium membranes as well as inclusion of cerebrospinal fluid (CSF) surrogate

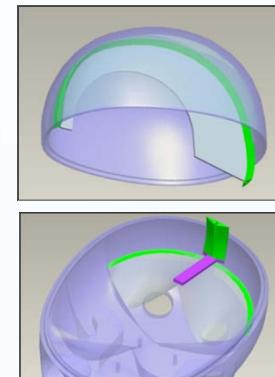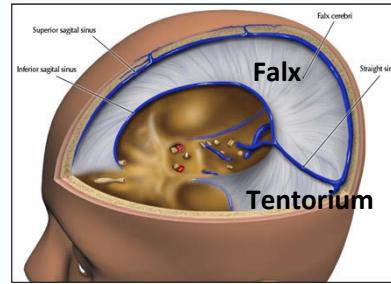

Introduction

Strategy

Facilities

Iterations



BI²PED & results

Upcoming work

Conclusion

Mk 3 or Blast Induced Brain Injury Protection Evaluation Device (BI²PED):

Anthropomorphic external and internal geometry, cast-in ICP transducers, external surface pressure transducers, mounted on HIII neck and six-accelerometer package



CFD Calculations

- Simulations have been carried out to examine the blast wave propagation between a headform and various helmet designs
- Helmet, head form, neck, and torso are all rigid and non-responding, so no shock propagation through these components occurs

Introduction

Strategy



Facilities

Iterations

Results

Upcoming work

Conclusion

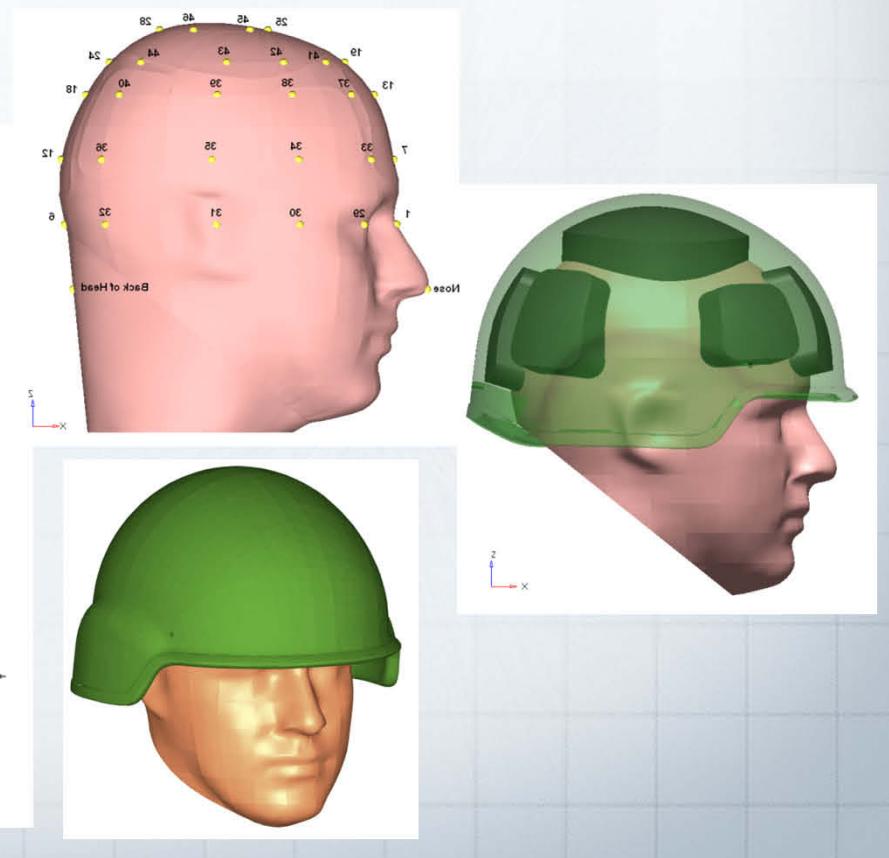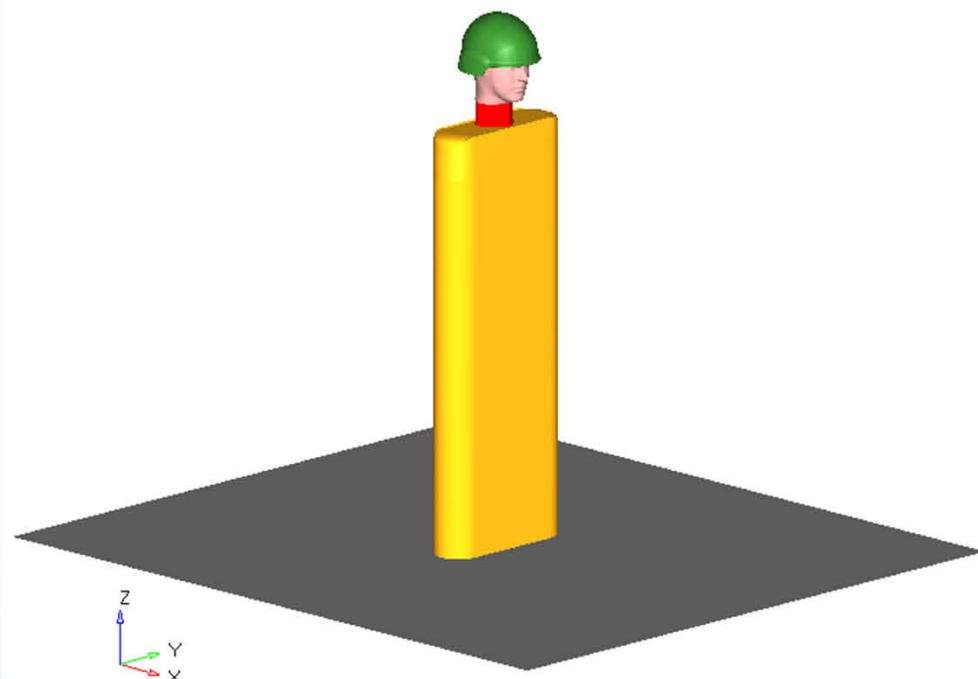

Frontal Blast, No Helmet

- The shock front arrived at the nose point, travelling upwards and rearwards, and then reflected off and diffracted about the head

Introduction

Strategy

Facilities


Iterations

Results



work

vision

Scenario 1 - Frontal Blast (no Helmet), Midsagittal plane

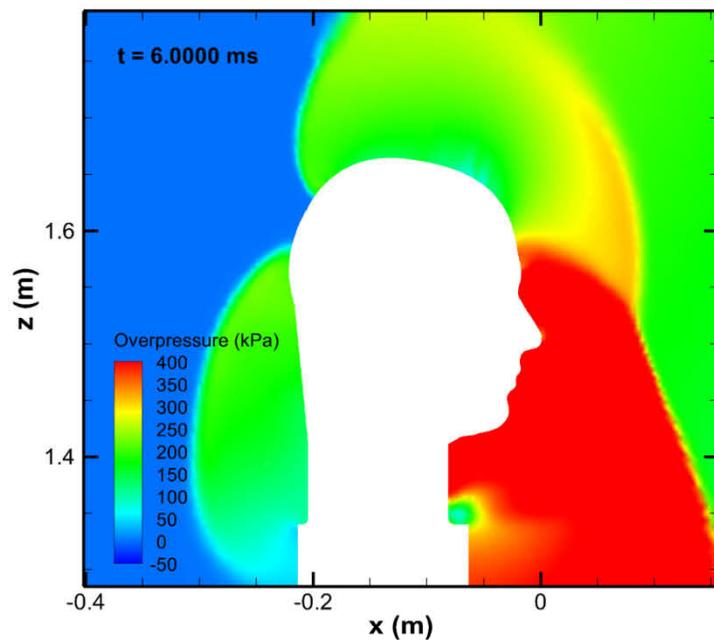

Scenario 1 - Frontal Blast (no Helmet), Coronal plane

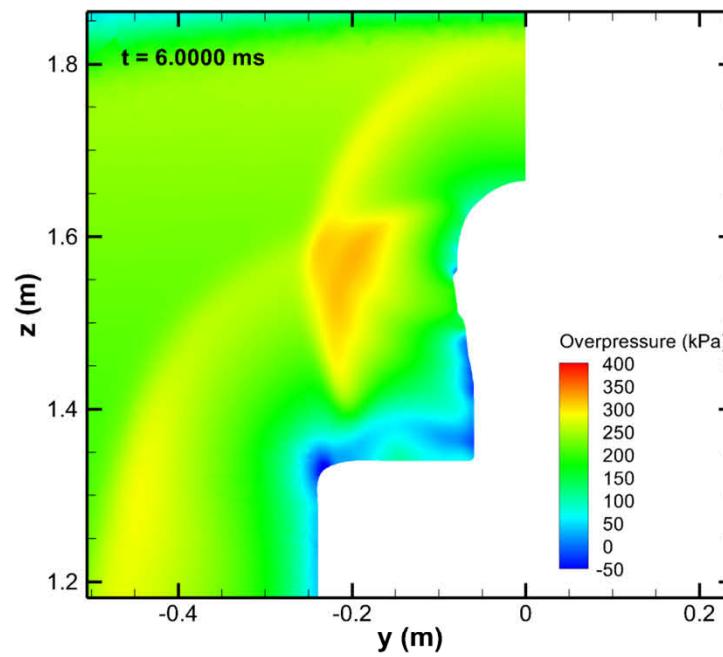

Frontal Blast, HELMET SHELL

- The shock front enters the head-helmet gap in the front and exits in the rear, while being turned and amplified by the shape of the head and helmet shell.
- Regions of high pressures were observed throughout the head-helmet gap
- Data such as forces on the helmet were computed

Introduction

Strategy




Facilities

Iterations

Results

Upcoming work

Conclusion

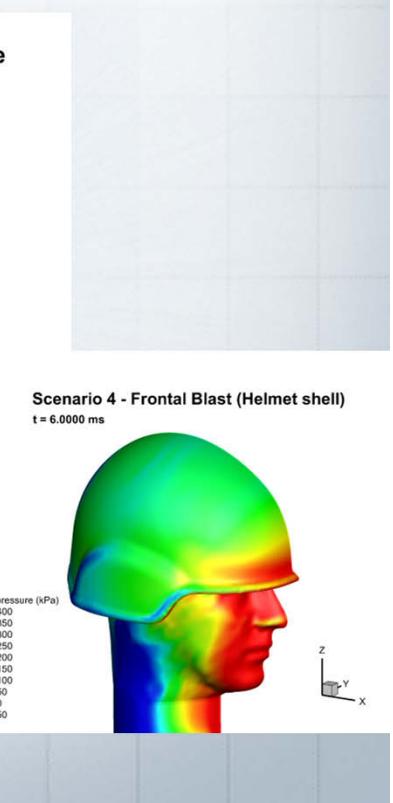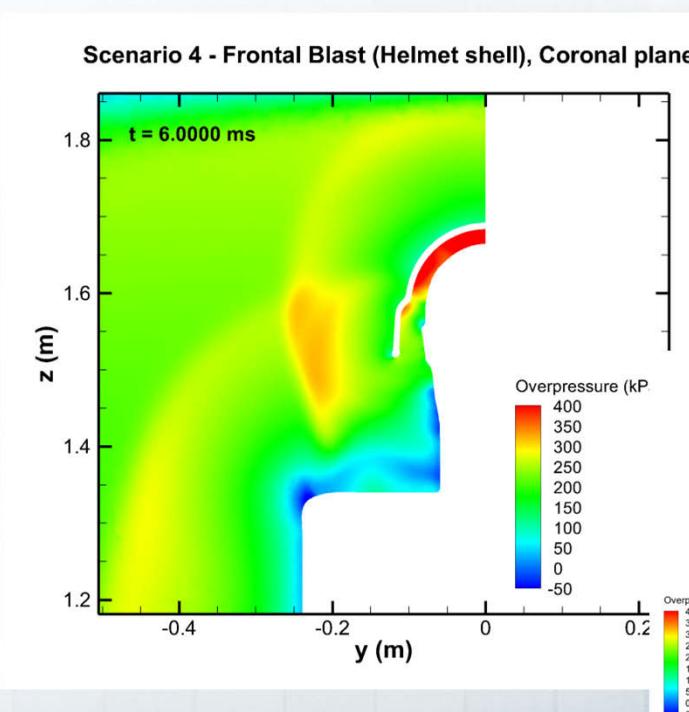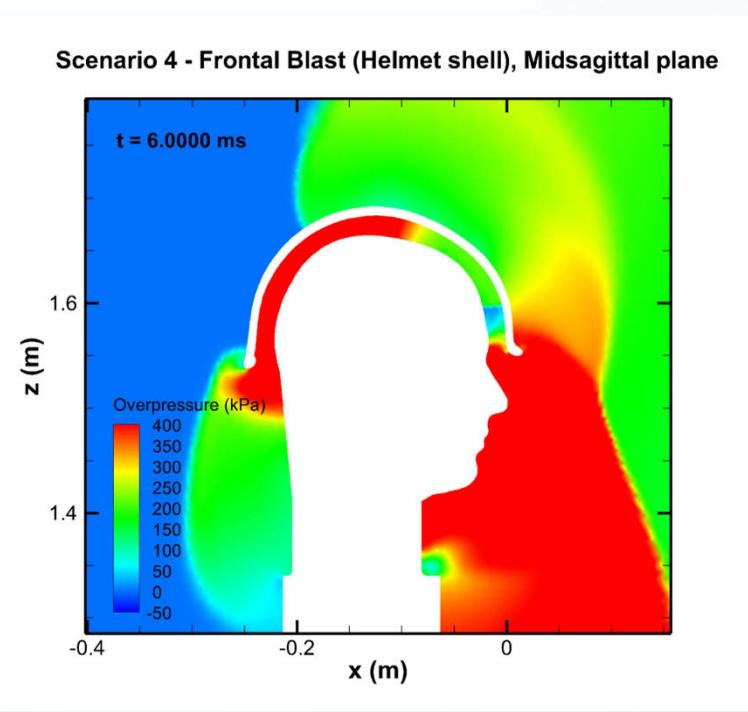

Frontal Blast, HELMET WITH PADS

Introduction

Strategy

Facilities

Iterations


BI²PED & results

Upcoming work


Conclusion

- The shock front enters the head-helmet gap in the front and exits in the rear, while being turned and amplified by the shape of the head and helmet shell, and the confinement of the space between the pads
- Regions of high pressures were observed throughout the head-helmet gap
- In general initial peak pressures were higher than those observed in the case with the helmet shell, but secondary pressure peaks were, in general, lower

Scenario 10 - Frontal Blast (Helmet with pads), Midsagittal plane

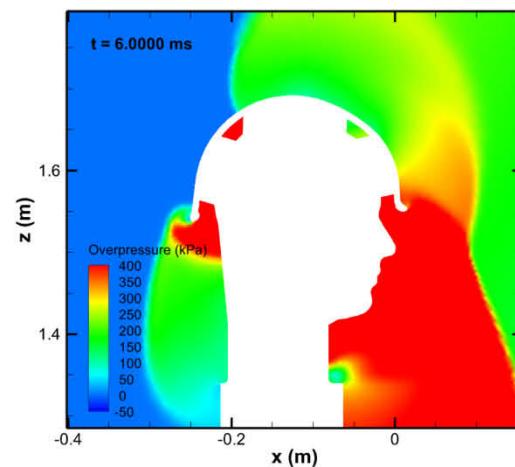


Scenario 10 - Frontal Blast (Helmet with pads), Coronal plane

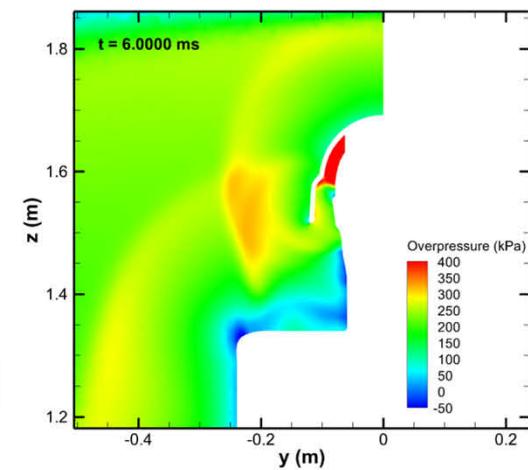

Scenario 10 - Frontal Blast (Helmet with pads)

t = 6.0000 ms

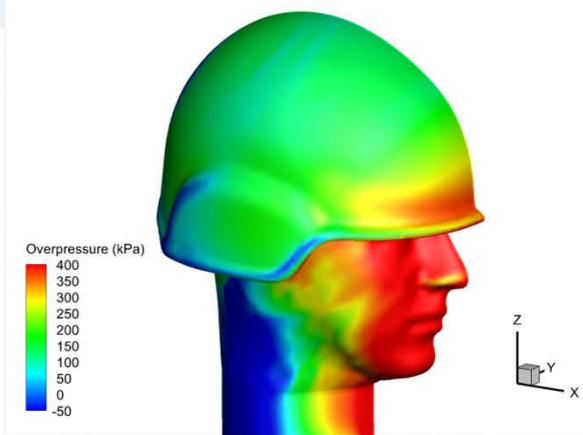

BI²PED – Recent results

- Free-field blast tests
- 18 tests ; 3 repeats per conditions
- 5 kg C4 charges, HOB=1.5m ; Providing the desired peak overpressures and durations as well as a tracking feature in the blast wave (i.e. ground reflection secondary peak)
- Stand-off between 5m and 4m; Assessing headform response at different overpressure levels
- 40 channels of instrumentation
 - 2x Bi²PED headform
 - 1x HIII headform for comparing the general head dynamics with the BI²PED headform
 - 2x Incident pressure gauge providing reference incident overpressure histories
- With and without protective headwear



Introduction

Strategy

Facilities

Iterations

BI²PED & results

Upcoming work

Conclusion

BI²PED – Recent results (Nov 2011 trial)

Introduction

Strategy

Facilities



Iterations

BI²PED & results

Upcoming work

Conclusion

- External pressure field

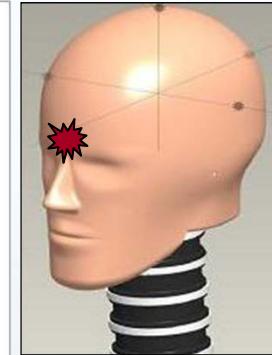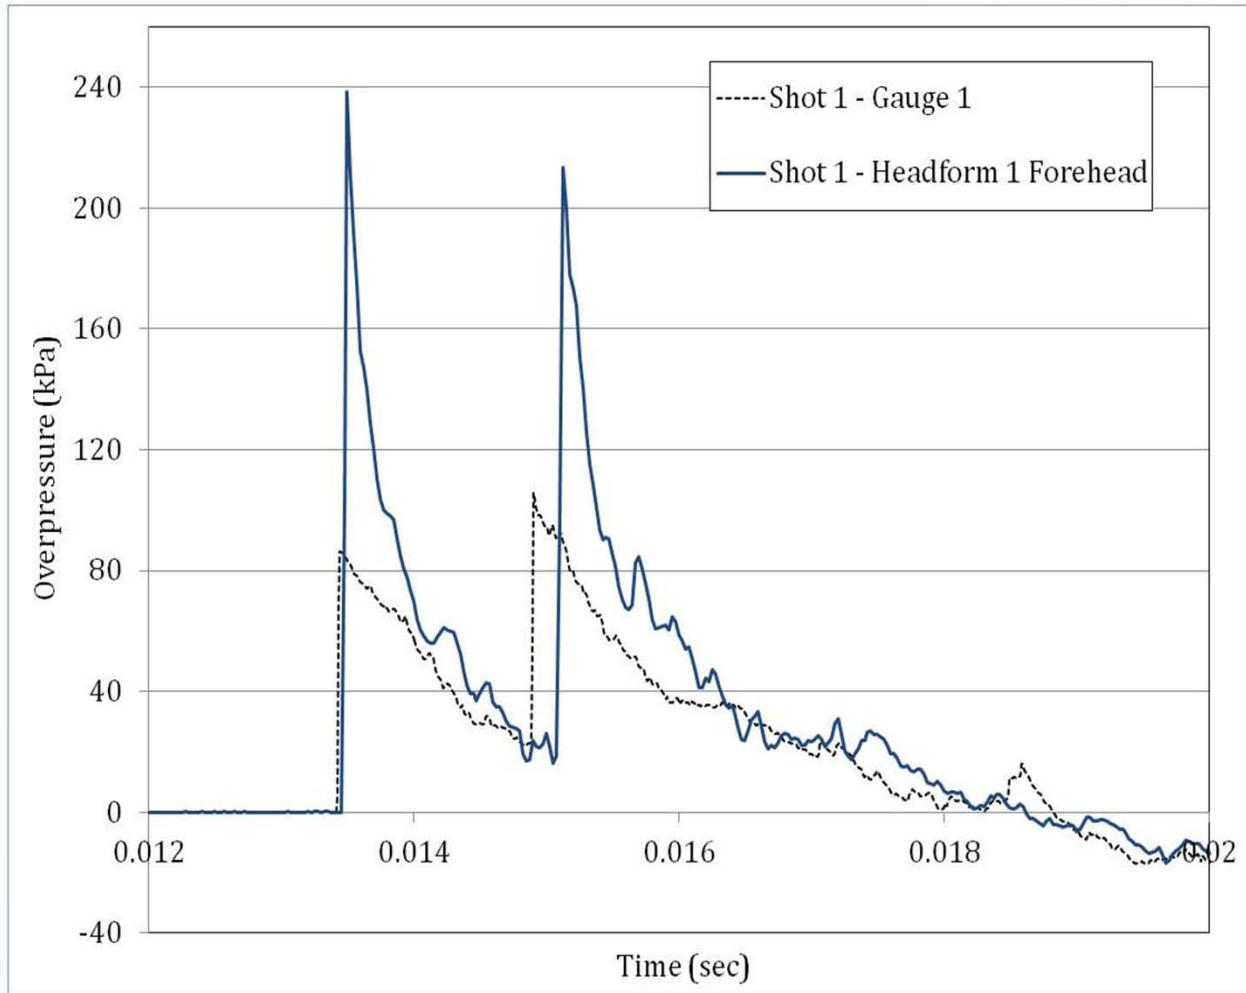

- **Forehead and reference gauge see blast wave first**
- **Forehead pressure is about 3 times incident reference pressure**

BI²PED – Recent results (Nov 2011 trial)

Introduction

Strategy

Facilities



Iterations

BI²PED & results

Upcoming work

Conclusion

- External pressure field

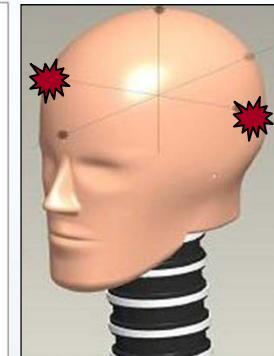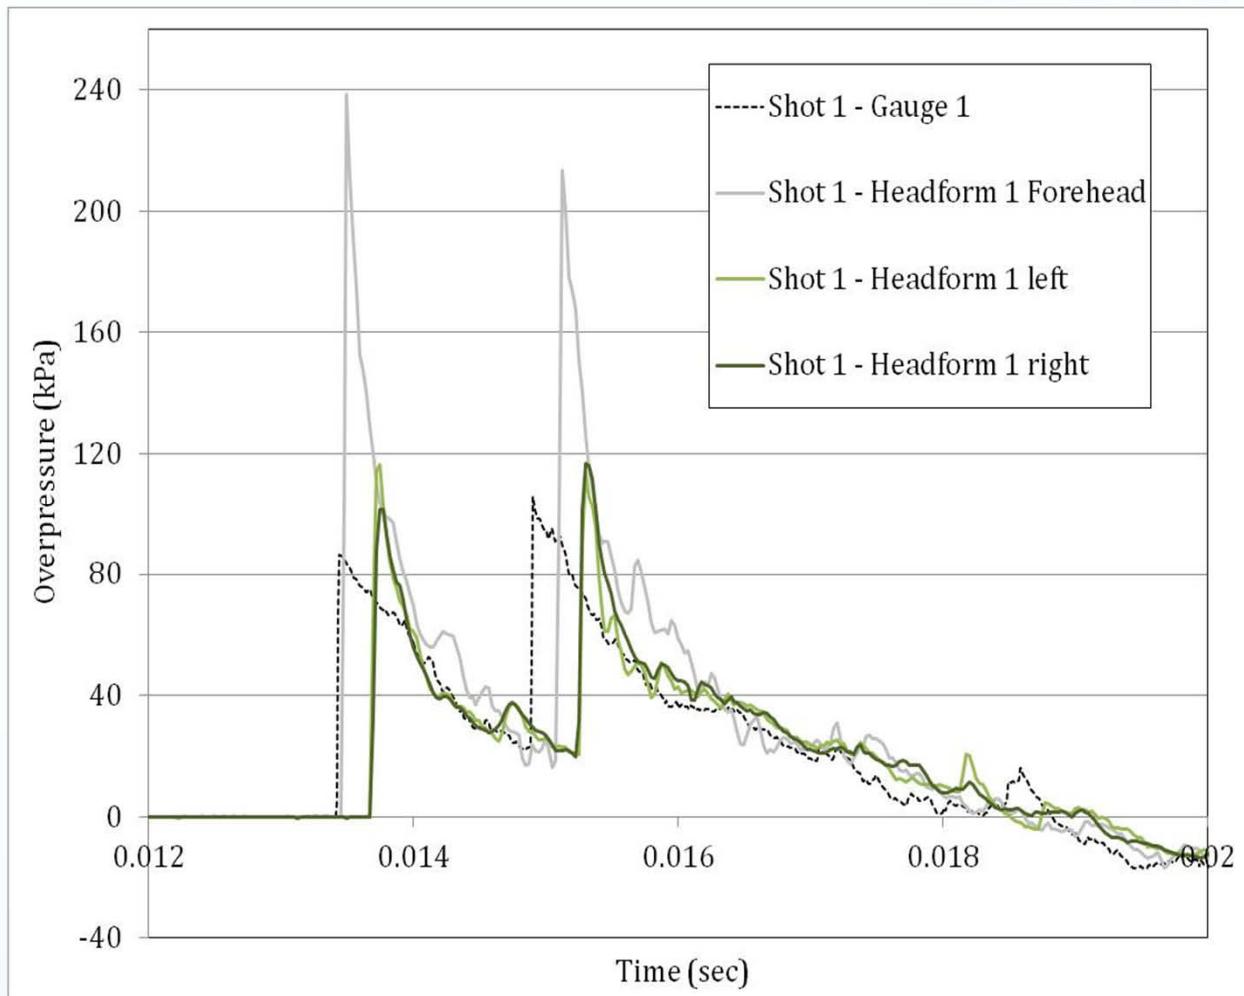

- Side gauges follows
- Great symmetry confirms orientation of headform
- Magnitude of overpressure slightly over reference incident pressure

BI²PED – Recent results (Nov 2011 trial)

Introduction

Strategy

Facilities



Iterations

BI²PED & results

Upcoming work

Conclusion

- External pressure field

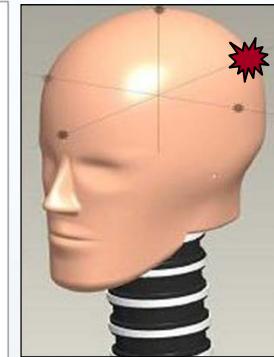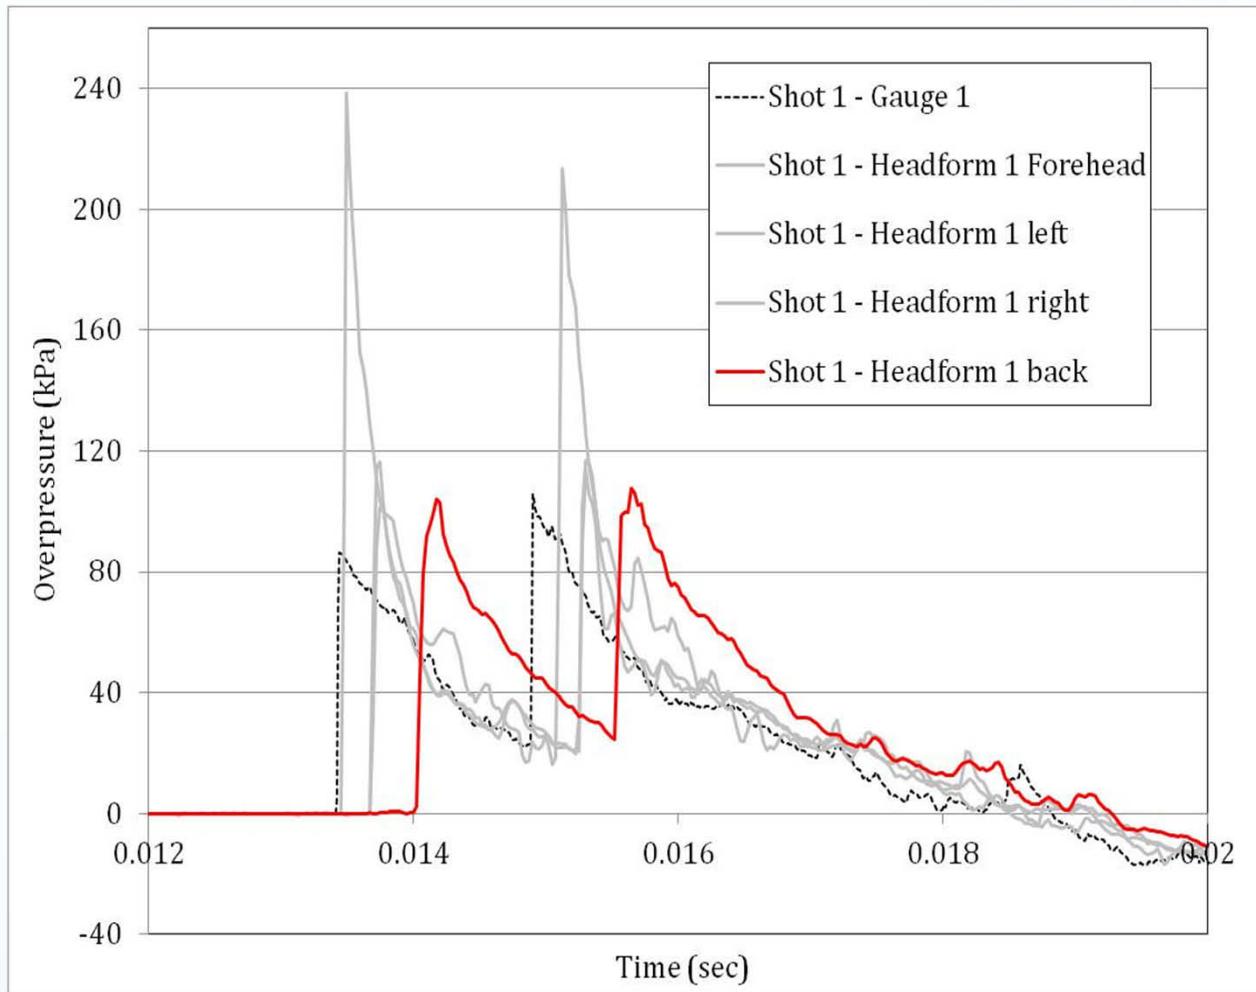

- Back gauge sees blast wave last
- Positive pressure signal following incident overpressure history
- Magnitude of peak is less than on the sides, and close to the incident overpressure

Conclusion

- A test device has been developed to evaluate headgear performance for mitigating blast induced mild traumatic brain injury (mTBI)
- The BI²PED has shown potential for discriminating between unprotected and protected configurations
- In general, initial peak pressures were higher than those observed in the case with the helmet shell
- The shock is amplified by the confined space between the pads
- Validation of the device against PMHS data was initiated

Introduction

Strategy

Facilities

Iterations

BI²PED & results

Upcoming work

Conclusion

